



**DSD3647 - EGR & Cooler Delete Kit for 3.0 TDI V6 Vehicles
Installation Photos**

- 1) To access the EGR Valve and Cooler you must first remove the intake manifold, once removed you can access the EGR components
- 2) After you have removed the EGR components in the valley of the engine, blanking plates are to be installed as shown below:

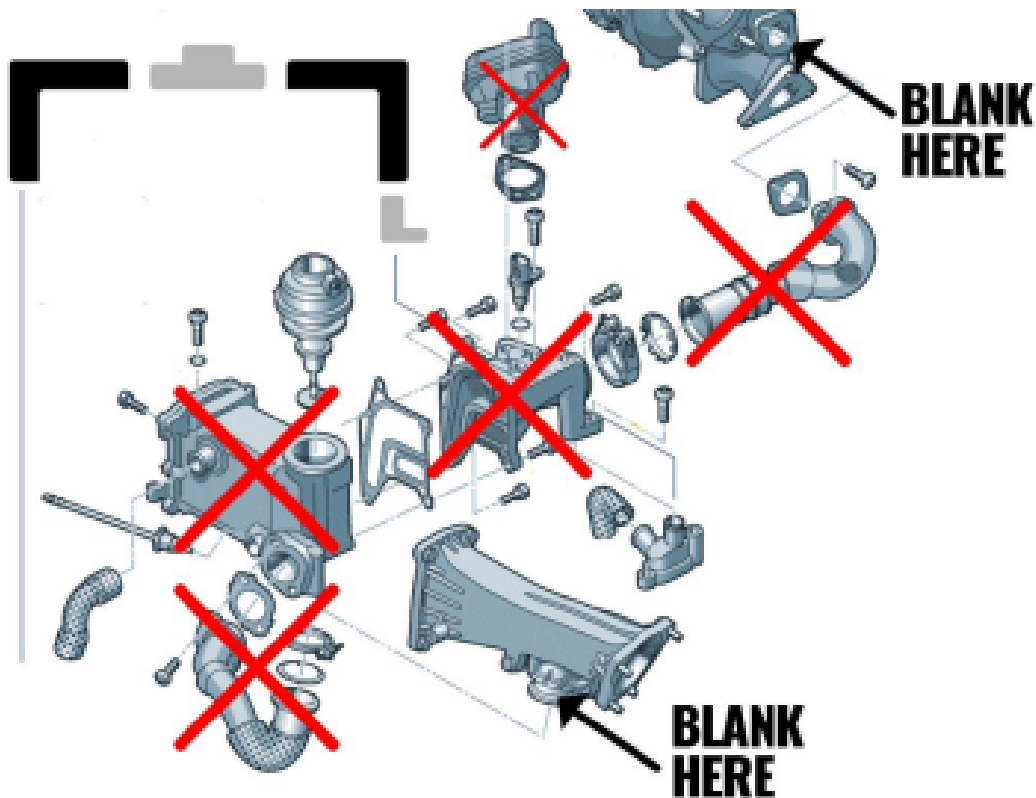

Turbo blanking plate location:

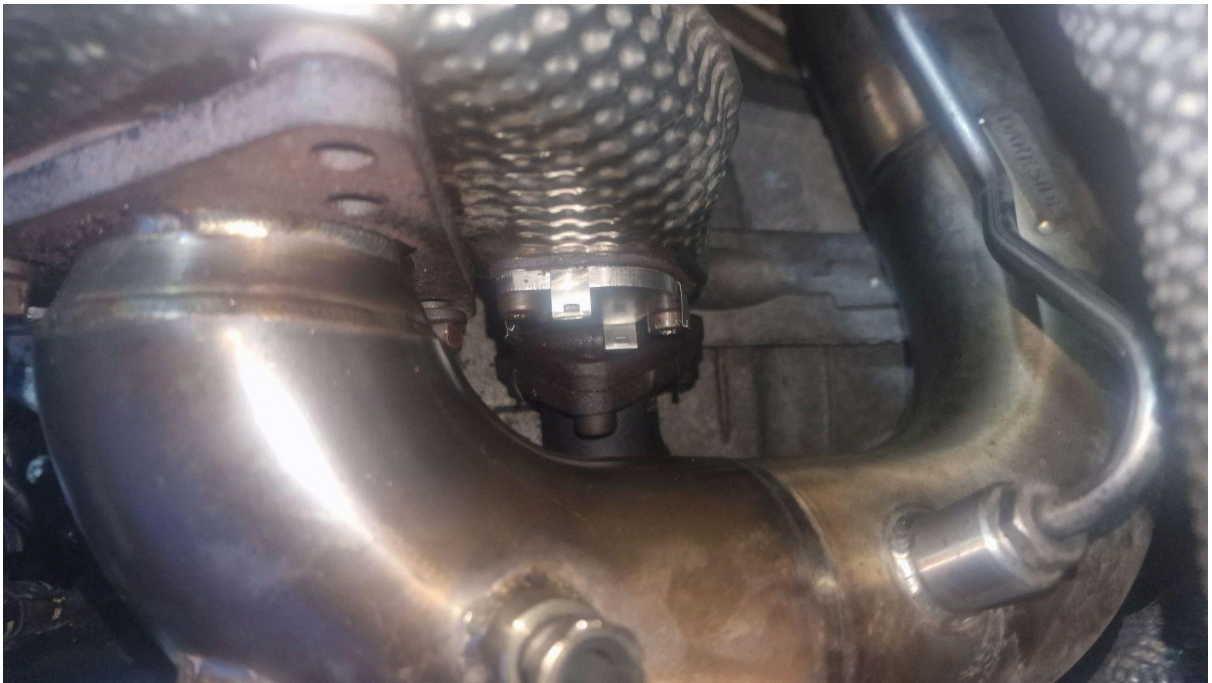

Intake manifold blanking plate location:




3) If installing without the Billet Coolant Flange, the coolant takeoff boss should be installed like so:





3.1) Alternatively if you have purchased the Billet Coolant Flange, you will replace the complete part:



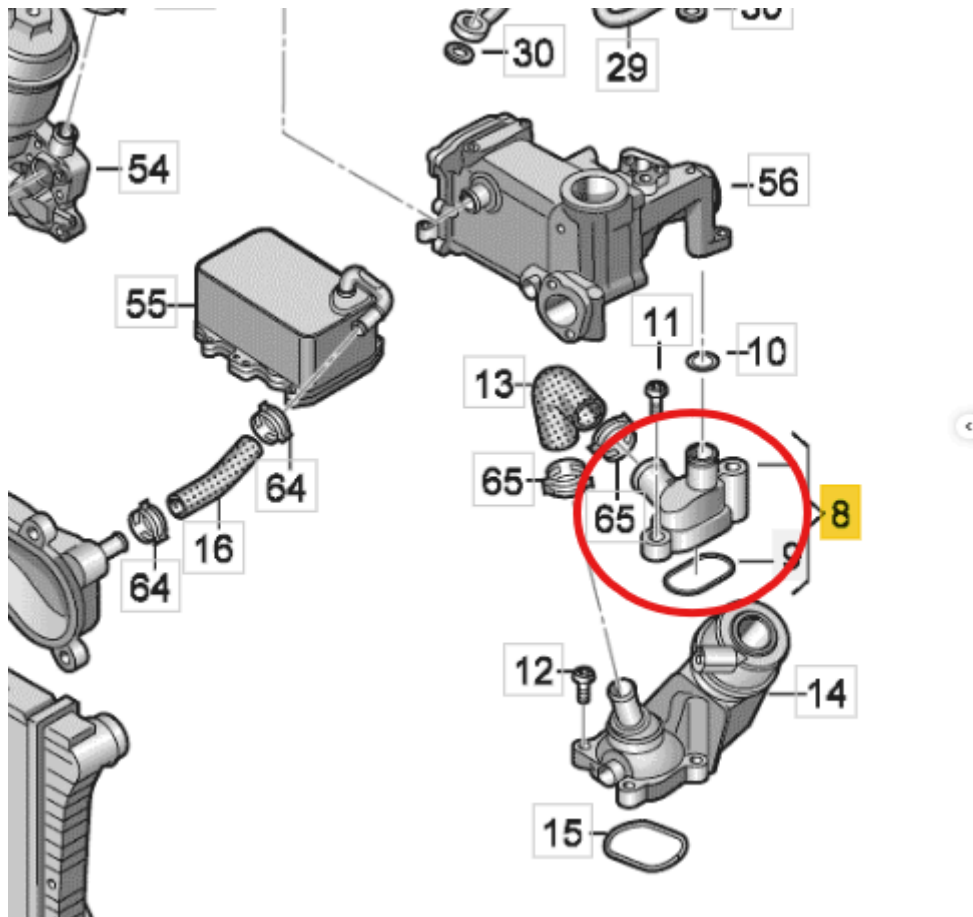

4) Install the silicone hoses using the supplied tube with temp sensor:

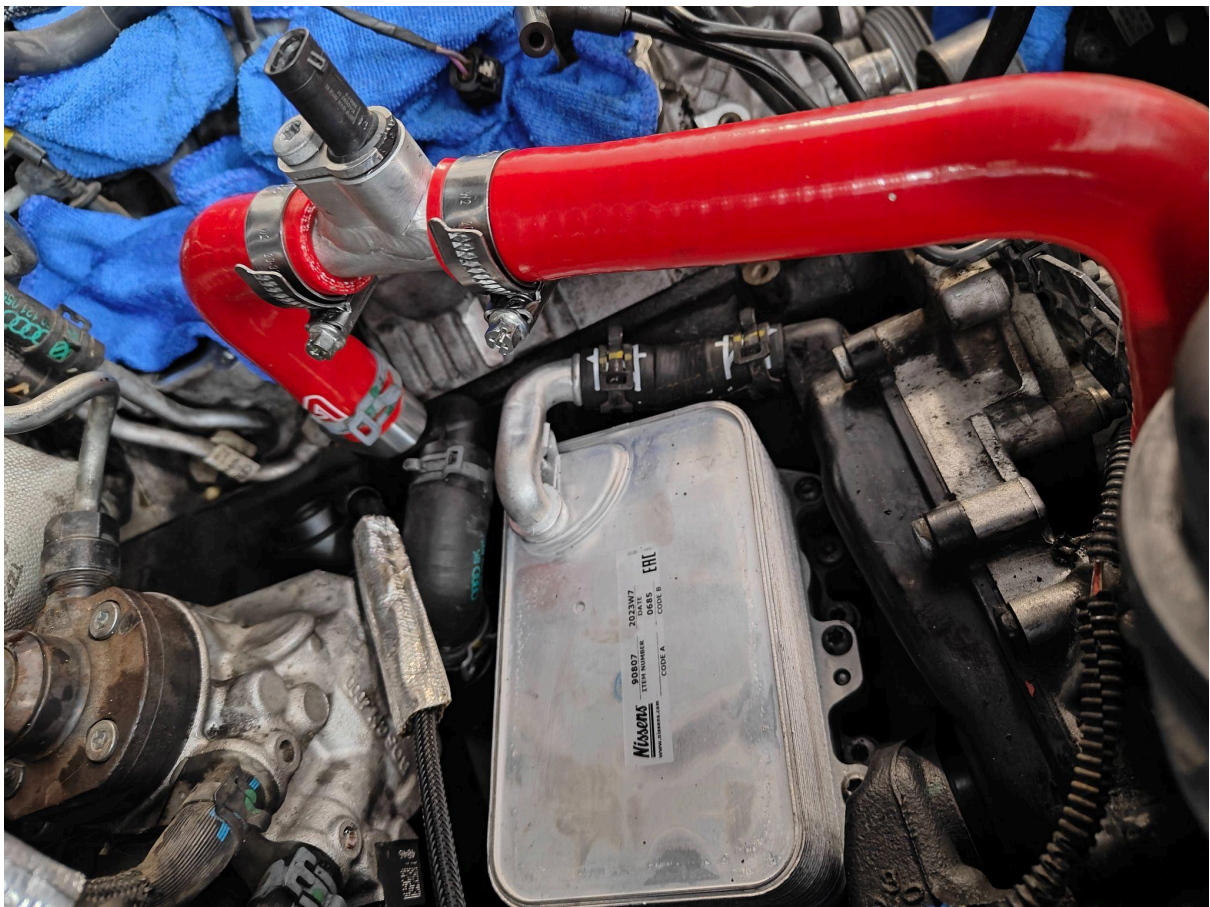

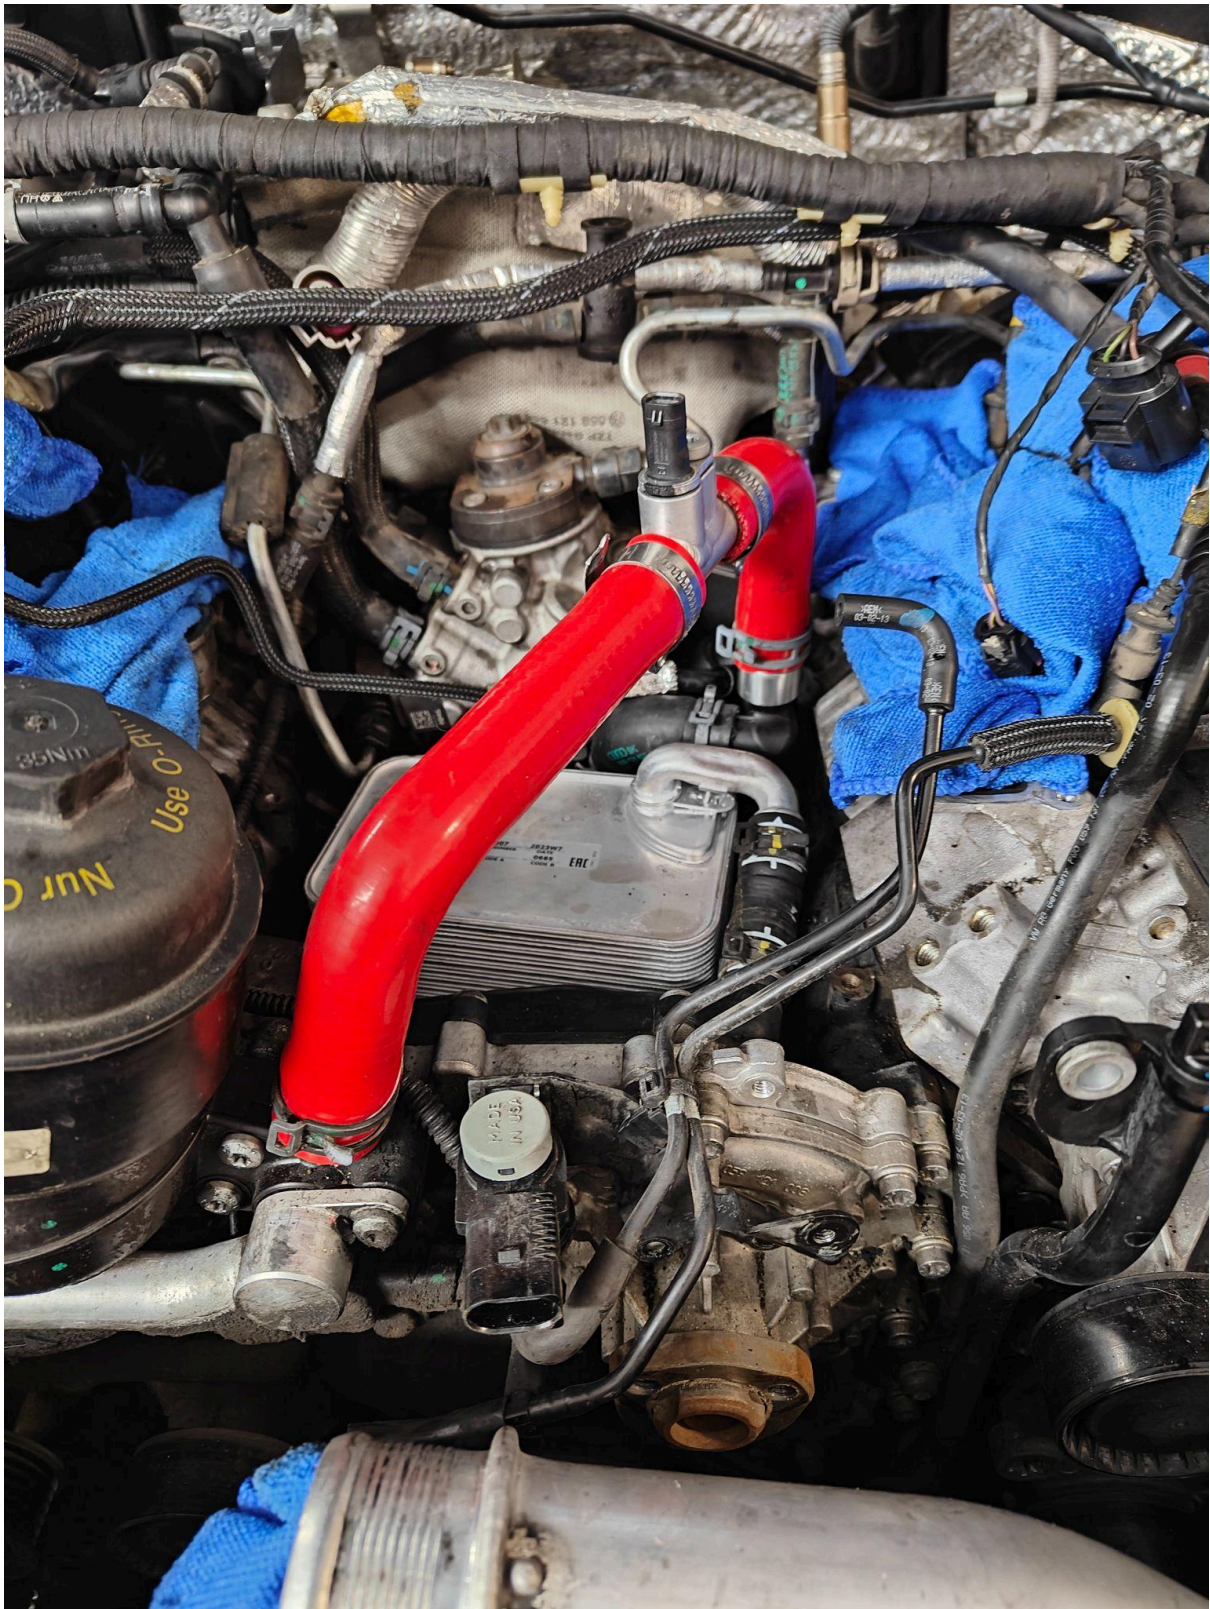

- 5) Reinstall the intake manifold and finally ensure all connections are secure and check for leaks.