

DSD6033 - EGR / Cooler Delete Fitting Guide


Blank on the Turbocharger EGR Port:

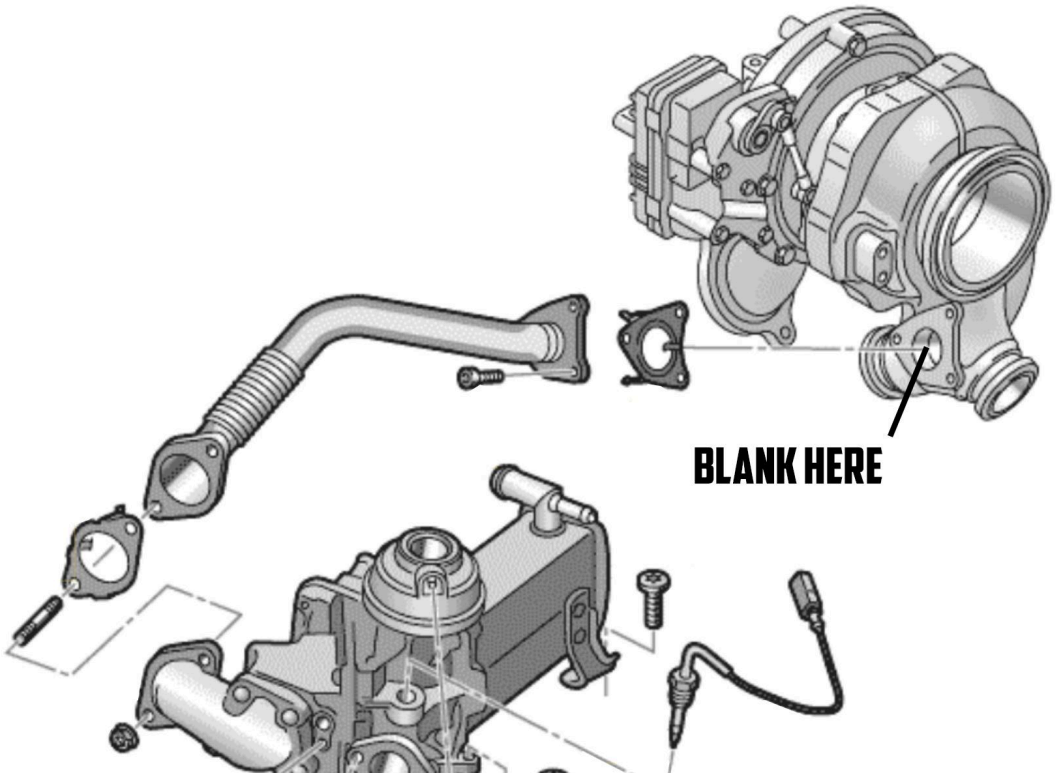


Blank on the Intake EGR Port:

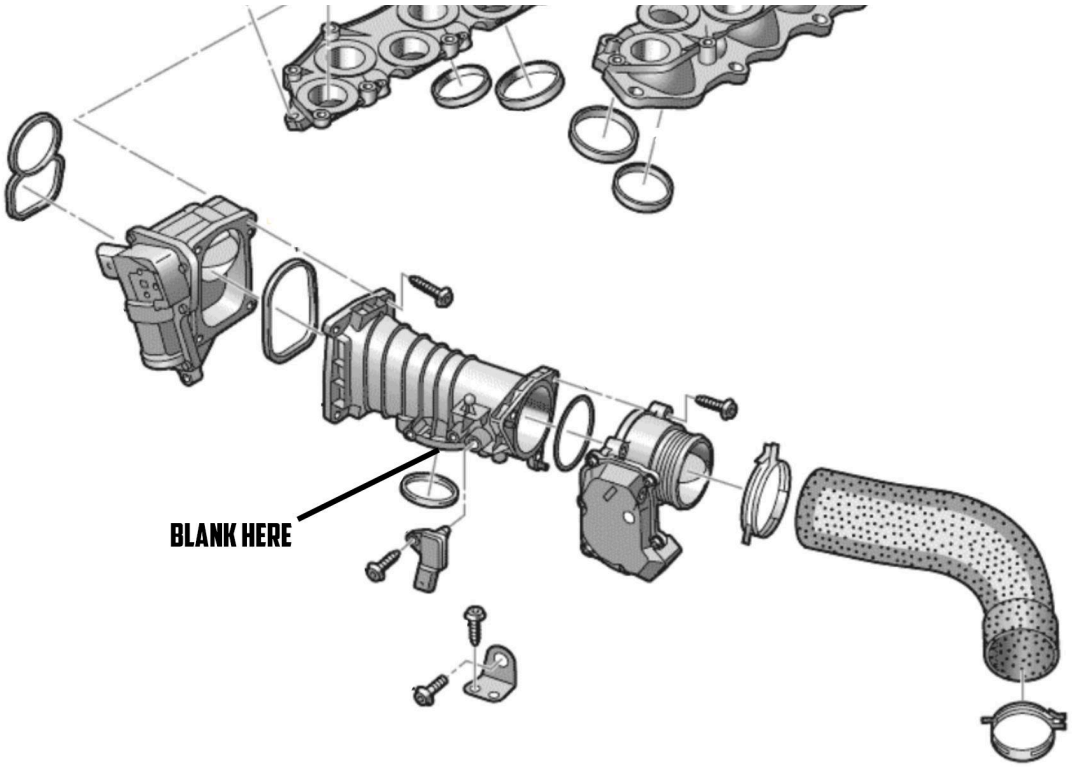

Remove EGR Cooler Unit - Remove the sensor and set aside:

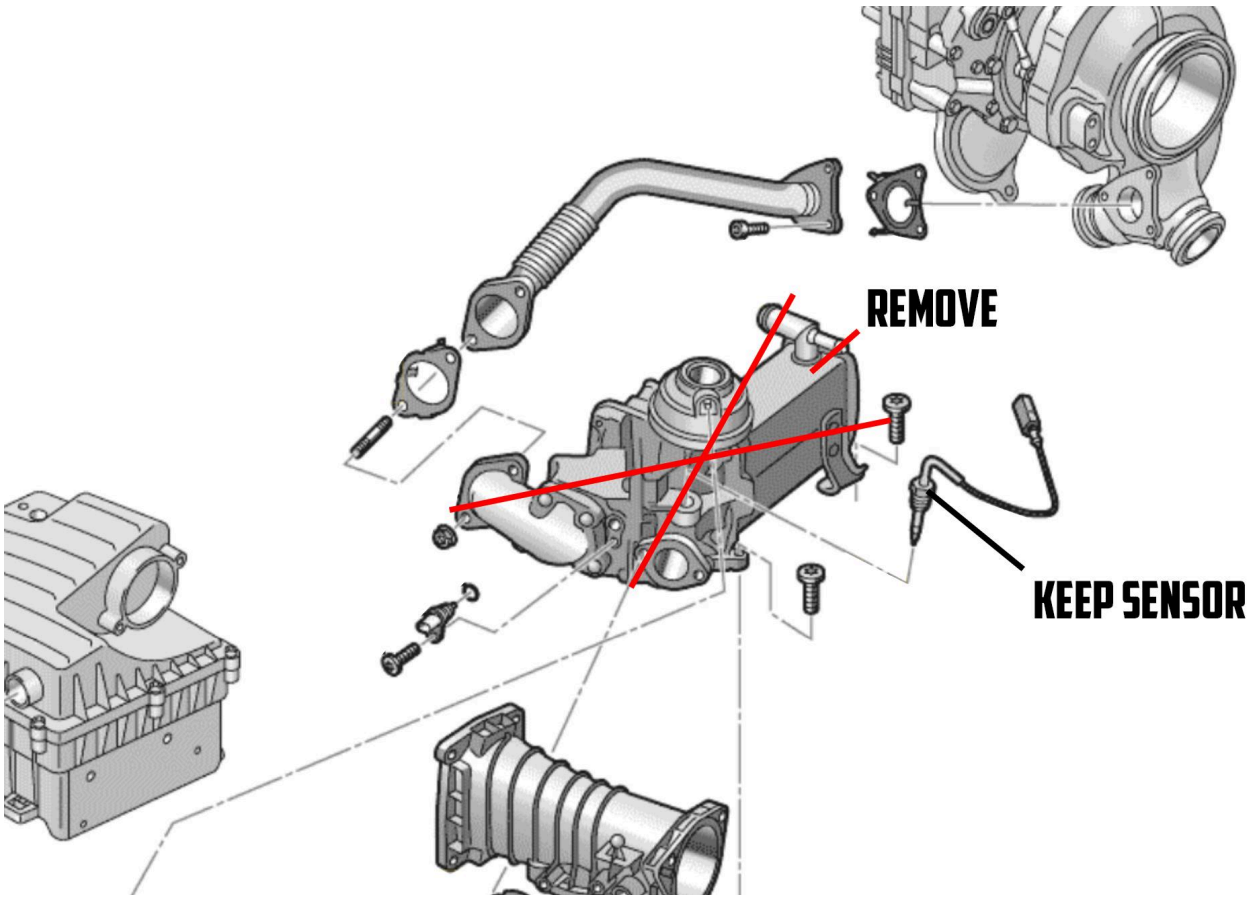

Use the silicone hoses provided to connect to the turbo coolant pipe:
PLEASE NOTE - THE HOSES WILL NEED TO BE CUT TO LENGTH

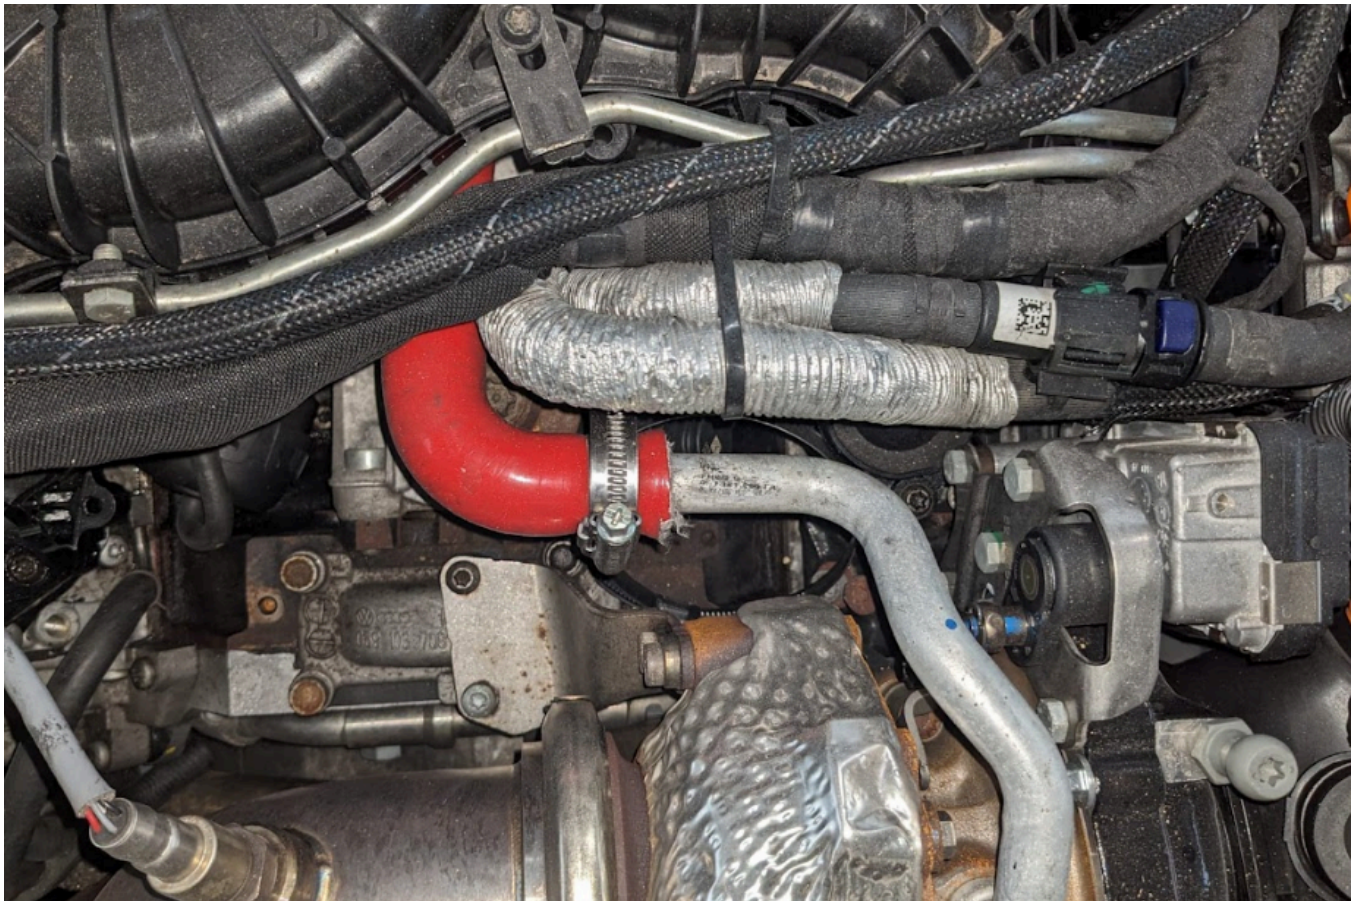

Use the small take off fitting and the second silicone (cut down) to join to the first silicone using the joiner:



Connect both hoses together using the joiner and refit the sensor removed from the EGR unit:



Tighten all clamps and check for leaks. Once fitted the software will need removing from the ECU.