



4.2 TDI EGR & Cooler Delete Installation Photos

Remove inlet manifold:



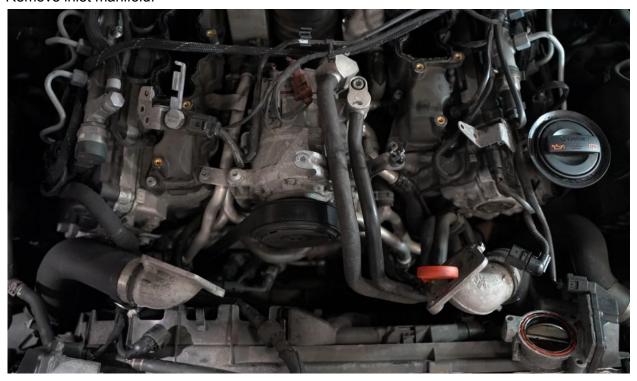

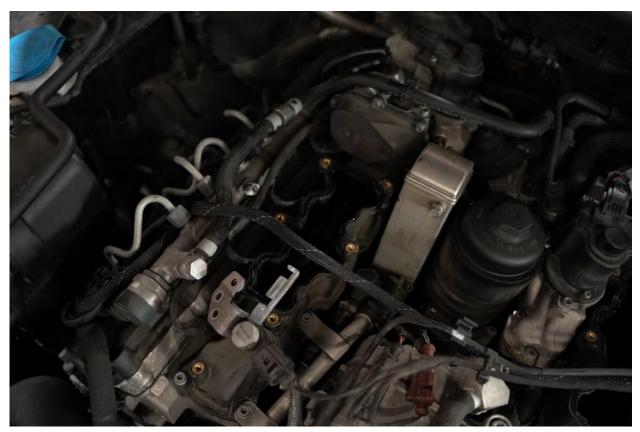



1 Blanking plate will be installed between the inlet manifold and short joining pipe (shown below)










The remaining 2 blanking plates are installed on the head. The stock sensors are retained.



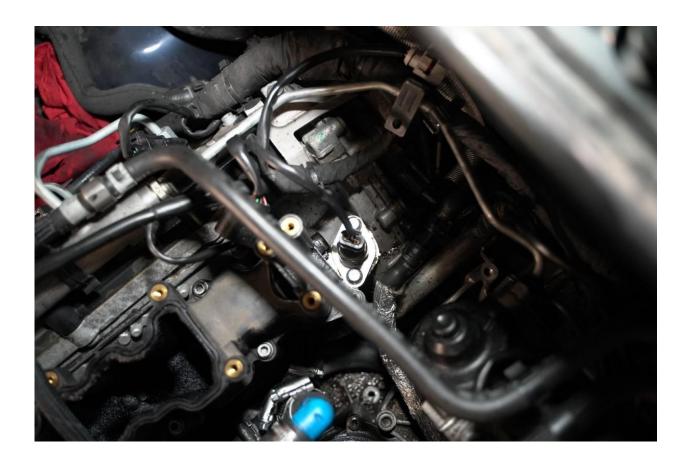

See the below routing of the coolant hoses and joiner:





